9430 SERIES DOUBLE HUNG






565 Cedar Way • Oakmont, PA 15139 • 1-800-424-3573 • www.chelseabuildingproducts.com



9430 SERIES DOUBLE HUNG

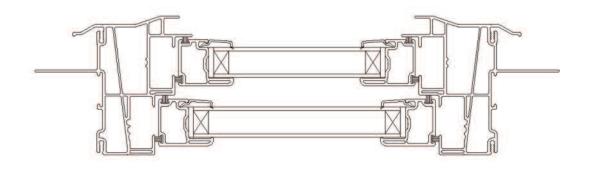



9430 Series Features

- Models include: Double Hung, Two- and Three-lite Horizontal Sliders (XX, XO, XOX) and Direct Set Picture Window.
- Welded frame and sash enhances structural integrity and increases weatherability.
- Available in new construction configurations.
- For ease of new construction installation, it comes with a pre-punched nailing fin.
- Subtle accessory grooves come standard so you can securely accommodate trim and other attachments. Multiple accessories available.
- Accepts 3/4" and 7/8" insulated glass.
- The sill is engineered for high water performance with an aggressive 7° **non-weep slope sill**.
- A beveled, easy to fabricate and clean, exterior offers a pleasant, aesthetic design.

- Area behind nail fin is flat to meet cement siding requirements (new construction frame only).
- Our T-Mullion system provides a continuous head and sill for multiple unit design.
- The optional Structural Mull system adds additional strength to multiple window combinations when required.
- Dual Weatherstripping at stiles, interlock, head and sill provides extra protection against air-infiltration and enhances the energy efficiency.
- Utilizes Chelsea's Ccore® composite reinforcement.
- The sash is SDL (Simulated Divided Lite) bar compatible.
- Low profile bevel frame maximizes daylight opening.
- Sleek, angled siding cover.
- Base allows for installation tie strap option.
- 3-1/4" frame width.

Performance Results

Structural

Test Standard - AAMA/WDMA/CSA 101/I.S.2/A440.11, NAFS
Tested to H Class LC-PG25 (54" x 77")
Tested to H Class LC-PG35 (44" x 75")
Tested to H Class LC-PG50 (40" x 63")

Thermal

The 9430 is capable of a U-Factor result of 0.23 The 9430 performs to a SHG result with a range from 0.24 to 0.62

Part of the American Homestead[®] family of products.





©2020CBP 9430AH-7-20